

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Switcher
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-HD4-V41

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	4/16/2014	1.6.0	3.5.2	Initial version.

Driver Notes:

- ARC mode can only be set ON by the driver, to exit the ARC mode select an input to be routed to the output.
- OFF-button for ARC mode is for status only.

IP Link® Device Interface Communication Sheet

Control Commands & States:

ARC Mode	On		
Auto Switch	On	Off	
Output	Select	Input 1	Input 2
	Input 3	Input 4	
Output Mode	On	Off	
Power Control	On	Off	

Status Available:

ARC Mode	On	Off ¹	
Auto Switch	On	Off	
Connection Status	Connected	Disconnected	
Output	Input 1	Input 2	Input 3
	Input 4		
Power Control	On	Off	

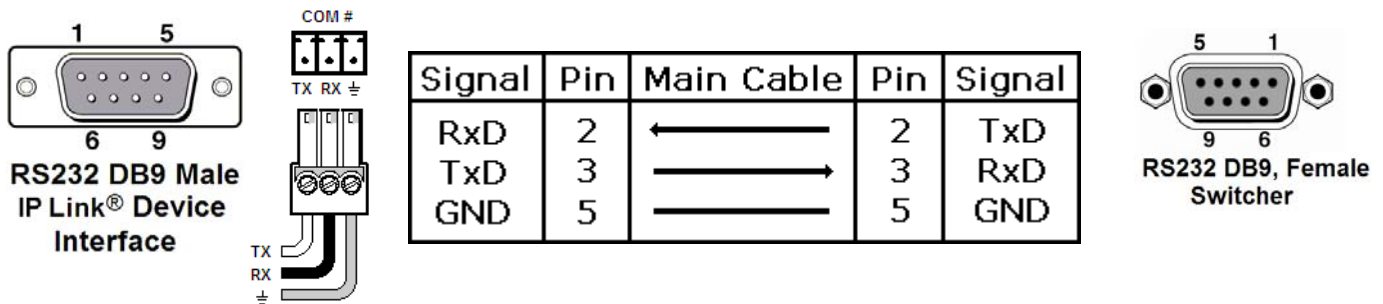
¹ Off-button is for status only. See driver notes for details.

MLC60 Series Supported Commands:

ARC Mode	On		
Auto Switch	On	Off	
Output	Input 1	Input 2	Input 3
	Input 4		
Output Mode	On	Off	
Power Control	On	Off	

Cable and Adapter Requirements:

M/F RS-232 DB9 straight cable.

Notes for the Device:**Serial communication:****Port Type:** RS-232**Baud Rate:** 9600**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

General Notes: